



ELEVATION

NOT TO SCALE

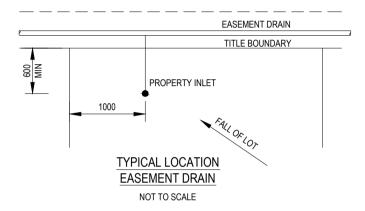

NOTES:

- 1. TYPE D PROPERTY CONNECTION, ONLY APPLICABLE WHERE PIPE HAS LESS THAN 750mm COVER.
- ALL PROPERTY CONNECTION PIPES AND FITTINGS TO BE OF 100mm PVC SEWER CLASS SN6, REFER AS 1260.
- 3. ALL PVC JOINTS TO BE SEALED WITH SOLVENT CEMENT OR RUBBER RING JOINTS.
- 4. DEPTH 'D' = 400mm MINIMUM UNLESS APPROVED BY COUNCIL.
- BED PROPERTY CONNECTION PIPE ON 50mm COMPACTED 20mm CLASS 3 CRUSHED ROCK OR CLASS 3 CRUSHED CONCRETE. BACKFILL TO 100mm ABOVE PIPE WITH 20mm CLASS 3 CRUSHED ROCK OR CLASS 3 CRUSHED CONCRETE.
- 6. BACKFILL TRENCH WITH CLASS 3 20mm CRUSHED ROCK OR CLASS 3 20mm CRUSHED CONCRETE TO 100mm ABOVE THE PROPERTY BOUNDARY CONNECTION IN EASEMENTS AND UNPAVED AREAS AND TO SUBGRADE LEVEL UNDER FOOTPATHS OF UNPAVED AREAS
- 7. ALL DIMENSIONS IN MILLIMETRES.
- NOT APPLICABLE TO MELBOURNE WATER CORPORATION DRAINAGE ASSETS. FOR MWC WORKS REFER TO MWC LAND DEVELOPMENT MANUAL.



Plot Date: 16 November 2015 - 4:27 PM Plotted by: Kerry Walton











